



INVIXIUM

INGUIDE

Quick Start Guide



In the Box

IXM INSTALL KIT



Dolphin Crimps
(qty 10)



Metal Mounting
Plate Screw
(qty 1)



Earth Ground Wire




Metal Mounting
Plate



Snubber Diode



Hex Key



Wired Back Cover



Wall Mounting Screws
(qty 4)


Getting Started

- 1 Remove the Mounting Plate, Wired Back Cover and Screws from the IXM INSTALL KIT.
- 2 Install the Mounting Plate at the desired location (INVIXIUM recommends 135-140 cm from the floor to the top of the device).
- 3 Make the necessary connections to the Wired Back Cover (refer to [Get Wired Pages](#)).
- 4 Unscrew and remove the Temporary Back Cover from the IXM device and connect the Wired Back Cover using the same screws.
- 5 Hang your IXM device on the Mounting Plate and secure it on the bottom with the screw provided.























Get Wired Glossary

ACP	Access Control Panel	OTG	On-The-Go
COM	Common	RLY	Relay
DAC	Door Access Control	SGND	Signal Ground
DGND	Digital Ground	SPO	Specific Purpose Output
EGND	Earth Ground	TAMPER	Tamper
GND	Ground	VIN+	Power (12VDC)
NC	Normally Closed	VIN-	Power Ground
NO	Normally Open	WDATA	Wiegand Data



Get Wired Connector

Wire Color	Wire	Label	Pin(s)	Wire Color	Wire	Label	Pin(s)
Red		VIN+	1	Blue/Black		RS485- (A)	2
Black		VIN-	3	Blue		RS485+(B)	4
Green/Yellow		EGND	5	Orange		DAC_OUT	6
Black/Green		DGND	7	Orange/Yellow		SPO_1	8
White		WDATA_OUT1	9	Green		WDATA_OUT0	10
Purple/Yellow		DAC_IN2	11	White/Purple		DAC_IN1	12
Blue/White		DAC_IN3	13	Green/White		WDATA_IN0	14
Purple		TAMPER	15	White/Black		WDATA_IN1	16
Grey/Red		RLY_NO	17	Grey		RLY_COM	18
Black/Red		SGND	19	White/Red		RLY_NC	20

Earth Ground

For protection against Electrostatic Discharge, Invixium recommends the use of a ground connection between each IXM device to a high quality Earth Ground available at the install site.

Connect to Earth Ground in one of two ways:

1 EGND wire (White/Black) from the Wired Back Plate

or

2 Loose Earth Ground wire direct to the mounting plate using one of the wall mounting screws (as shown). Ensure that the lug is secured tightly for contact between the device and the mounting plate.

Ensure all Earth Ground connections are made to each device prior to turning on the power.



Power It Up

When using an external power supply, ensure that the regulated, filtered and dedicated power source (Safety tested, FCC/IC/CE certified) provides a minimum of 1A @ 12 VDC per device.

When using PoE for demo purposes, an IEEE 802.3af compliant Active Midspan Injector is required (sold separately). Refer to table for INVIXIUM recommended PoE Injector specs. Full PoE deployments should include a centralized PoE PSE. Both IEEE 802.3af power transmission modes (A and B) are supported.



INVIXIUM recommended PoE Injector Specs

Input Voltage	90-264 VAC, 60 Hz
Input Current	0.4 A @ 100 VAC
Output Voltage	48 VDC
Output Current	0.32 A
Power	15.36 Watt

INVIXIUM recommends the use of battery back up or a UPS with built-in surge protection.

WARNING: Product Warranty is void if improper power (under or over) is supplied to the device.


Ethernet and Wi-Fi

For Ethernet communication, a specific range of allowable IP addresses can be set for improved security.

PoE+ connectivity is available on all devices except MYCRO.

For Wi-Fi communication on the TOUCH 2 (select models), 802.11 b/g/n protocols are supported. DHCP is enabled as a factory default. WEP, WPA and WPA2 encryption options are available.

MERGE does not support Wi-Fi communication.

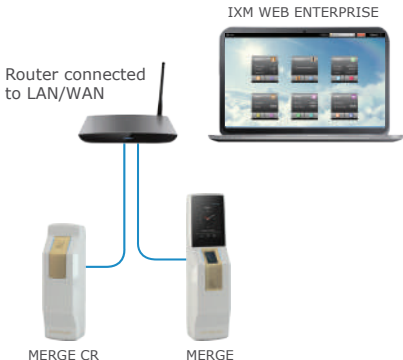

RS-485 Configuration

For RS-485 networks, ensure that IXM devices are wired in a daisy chain configuration, up to a maximum of 31 devices. At a baud rate of 9600 bps, make certain that the maximum cable length is not longer than 1200 m (4000 ft).



USB Serial Communication

For Serial Communication, IXM devices are equipped with USB Aux port.

The USB port can be used to connect a Flash Drive via Micro USB OTG cable and perform functions like upgrading firmware, downloading transaction logs and configuration files.

The USB port can also be used to connect to a PC running IXM WEB via Micro USB cable.



Micro USB Cable



Micro USB OTG Cable
(Sold Separately)




Bottom USB Port


Wiegand

IXM devices have the option to use the Standard 26-bit Wiegand format or a Custom Wiegand format (up to 512 bits) to suit any Access Control System.

All IXM devices are set to Standard 26-bit format as a factory default.

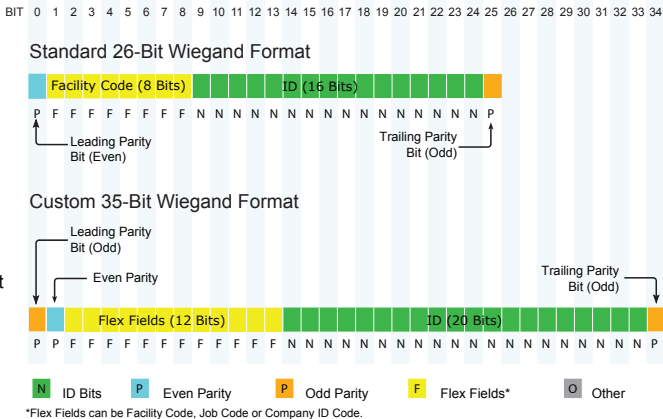


ACP Connections

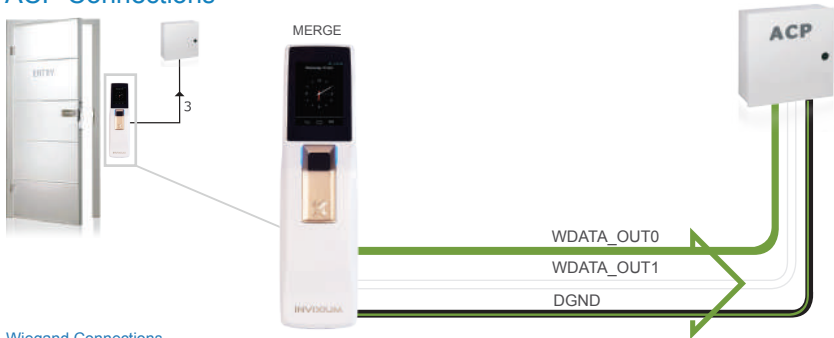

Wiegand Connections

WDATA_OUT0		(10)
WDATA_OUT1		(9)
DGND		(7)

DAC Connections (Electric Door Strike)

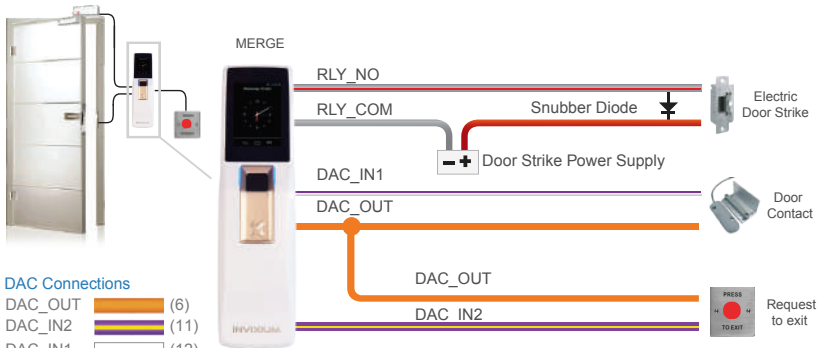


DAC Connections

DAC_OUT		(6)
DAC_IN2		(11)
DAC_IN1		(12)
RLY_NO		(17)
RLY_COM		(18)

Max Relay Rating = 1A @ 24VDC

NOTE: A separate power supply is required for the door strike


DAC Connections (Magnetic Lock)

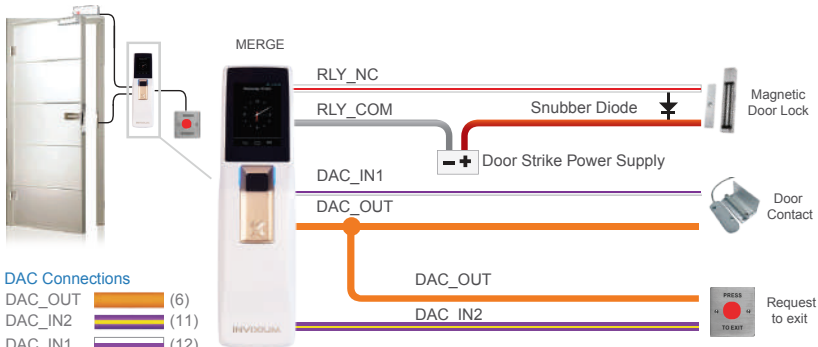















Max Relay Rating = 1A @ 24VDC

NOTE: A separate power supply is required for the door strike

Enrollment Best Practices



Preferred Fingers

	 Incorrect	 Correct	
Pressure	 Too Low	 Too High	 Good
Position			
Rotation			
Condition	 Dry	 Wet	 Good

INGUIDE

This is a Quick Start Guide. For a detailed guide please refer the Invixium Installation Guide.

Visit the Customer Portal for more Invixium resources at www.support.invixium.com.

For technical or customer support issues, please contact your Local Authorized Reseller first.



Contact Invixium Support at support@invixium.com.

Enjoy the Experience.

Some features may vary based on device models. Copyright © 2019, INVIXIUM. All rights reserved.

INVIXIUM.COM

© 2019 Google Inc. All rights reserved. Chrome™ browser is a trademark of Google Inc.
Firefox logo® is a registered trademark of the Mozilla Foundation.
Windows®, Internet Explorer® and Edge® are trademarks of the Microsoft group of companies.
Safari® is a trademark of Apple Inc.

P/N XAD-00E-117-03G